


....the right partner for Harness Maker

Processing:

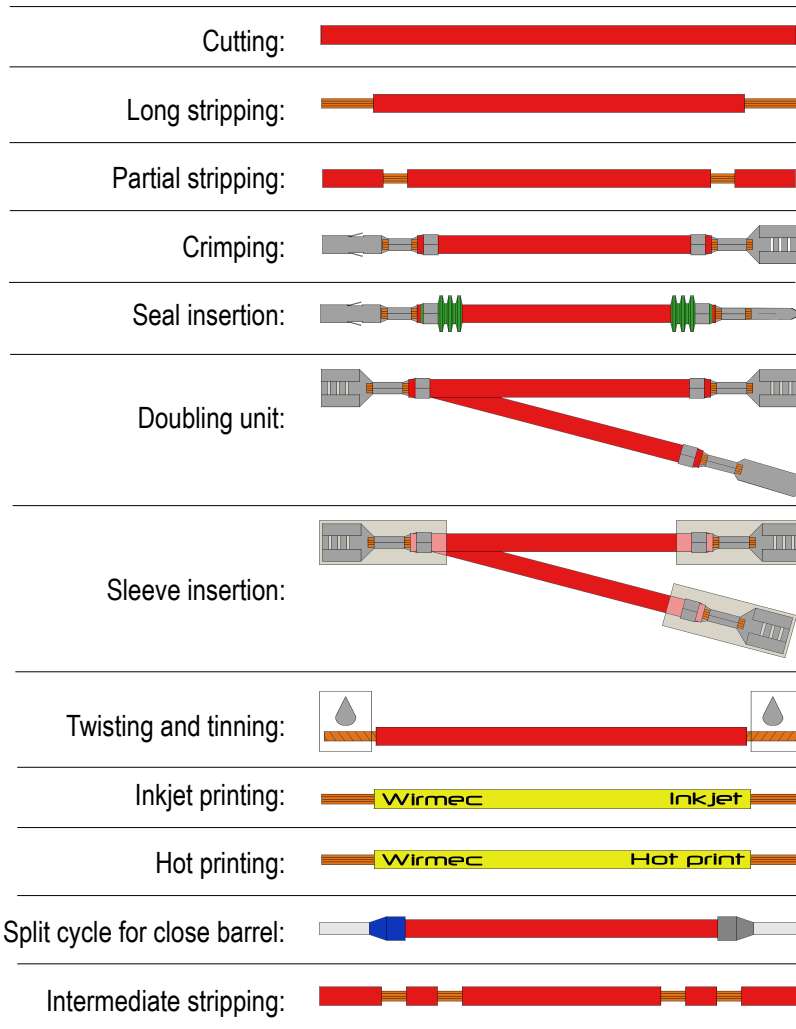

Automatic crimping machine of the latest generation. Given its wide layout can accommodate up to six processing stations.



Equipped with the most advanced mechanical and electronic technologies, it is versatile for multiple processes. Very simple and intuitive thanks to a user interface schematic.



....the right partner for Harness Maker

Key features:

- Equipment up to six processing stations
- Highly ergonomic and easy to maintain
- Electronic crimp height adjustment (optional)
- Integrated crimping height measurement (optional)
- Integrated pull test device (optional)
- Integrated crimp quality control CFA (optional)
- Simple user interface and intuitive
- Ample opportunity to save parameters
- Innovative patented twin-wire feeder
- Use indiscriminately roller or belt on wire feeder

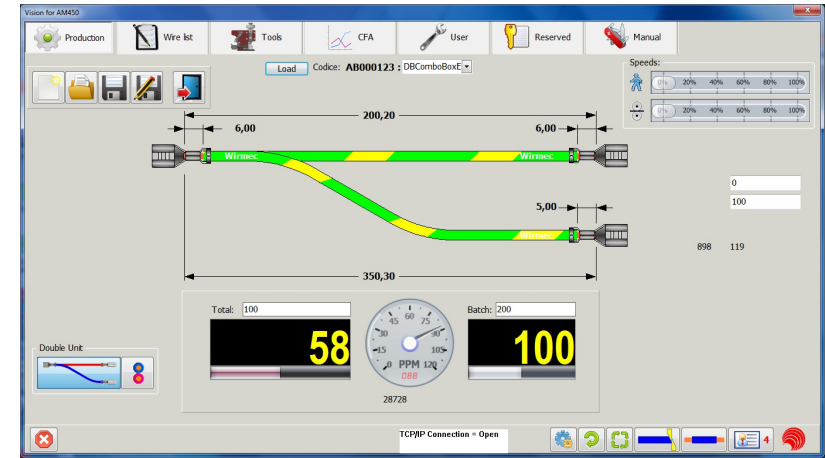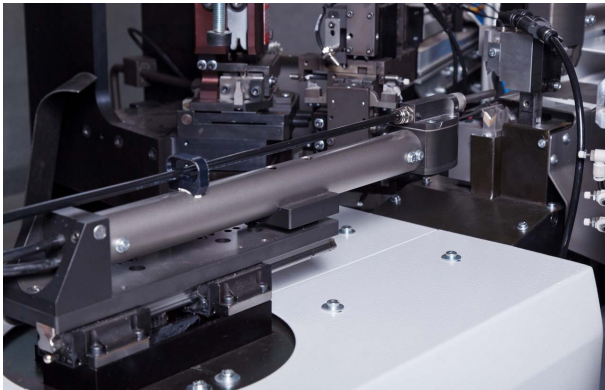

Technical data:

- Cross section: 013 – 6mmq (10mmq optional)
- Wire length min: 42mm crimp only on side
55mm crimp both side
30mm (optional)
- Strip length: 0,1 – 15mm side 1
0,1 – 30mm side 1 (optional)
0,1 – 15mm side 2
0,1 – 30mm side 2 (optional)
- Speed feeder: 12m/s
- Power supply: 400V 50/60Hz 10kVA
- Air supply: 6-7bar
- Weight: 1300Kg
- Noise: 75dB
- Dimensions: 4000x1800x2000mm

